


**WALL LOUVRE**  
**Continuous**  
**ALUMINIUM**

*All louvres are manufactured to suit your requirements.*

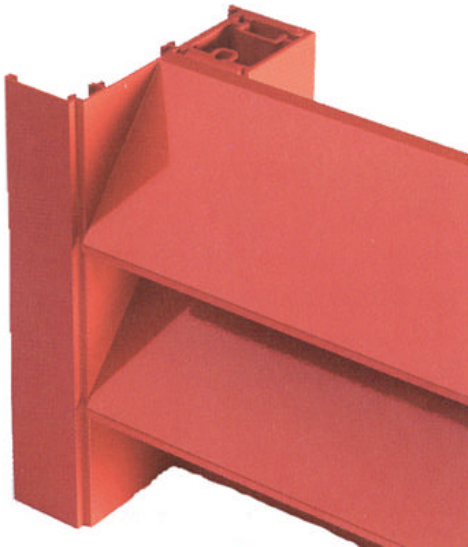

**Product description**

Extra heavy duty extruded aluminium profile pitched at 75 mm and optimised air flow. This latest innovation within the Renson range is provided with a choice of integral soffit mounted guards to suit the performance parameters. Achieves category 'A' classification BSRIA/HEVAC weathering test, natural ventilation.

**Materials**

Aluminium extrusion to EN 573-3, alloy EN AW-6063

**Finishes**

A wide range of colours and coatings are available.

**Doors**

Available, single & double doorsets with Renson standard furniture. Doors are pivot hung.

**Features**


Top blade optimises pitch continuity

Bottom blade cut to size to provide clean cill definition

Framed or flanged trim

**Technical Characteristics**

Pitch	75 mm
Depth	63.5 mm
Height	89.2 mm
K factor	16.52
Free Area	42%
Max. unsupported span between mullions	1,500 mm

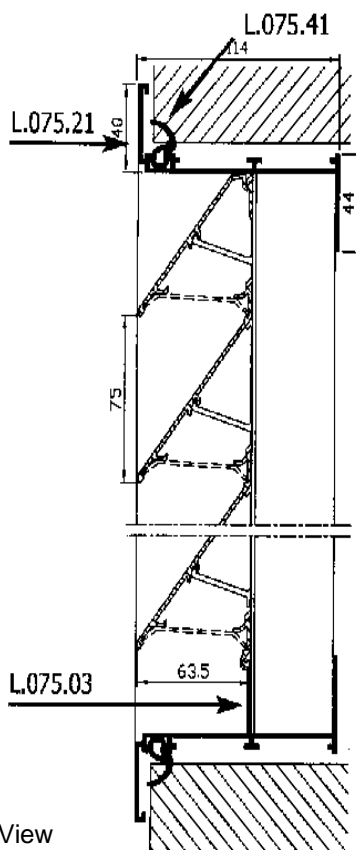

Plan View

